


130V-065

Shape and size

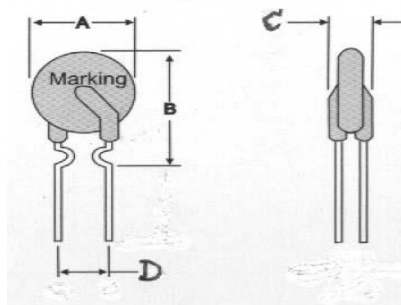

Model	A	B	C	D	Lead.
	max.	max.	max	Type	Φ
130V-065	12.8mm	18.0mm	3.8mm	5.1mm	0.60mm

Lead wire material: tin-plated metal wire, $\Phi 0.60\text{mm}$.

Encapsulation material: Flame-retardant epoxy powder, meeting UL94V-0 requirements

Electrical performance

Maximum overload current	$10A_{AC}$	Maximum voltage	$130V_{AC}$
Maximum non-operating current $25^{\circ}\text{C}\pm 2^{\circ}\text{C}$	650mA	Minimum operating current 25°C	$1.3A$
Starting zero-power resistor	$0.45-1.0\Omega$	Maximum resistance one hour after action	2.0Ω

Testing conditions and delivery standards

Inspection items	Test	Delivery standard
Starting zero-power resistor	$25^{\circ}\text{C}\pm 2^{\circ}\text{C}$, Place in the air	$0.45-1.0\Omega$
Non-operating current	$25^{\circ}\text{C}\pm 2^{\circ}\text{C}$, 650mA , Maintain 60min	Non-operating
Typical action time	$25^{\circ}\text{C}\pm 2^{\circ}\text{C}$, $3.25A$	Less than 5.2s
Motion durability	$130V$, $10A$, 15min	No open flame or burning

Working temperature : -40 to 85

Packaging conditions: 1000pcs per bag