


130V-075

Shape and size

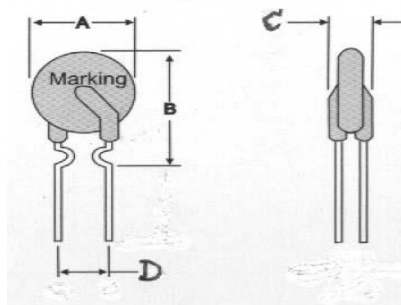

Model	A	B	C	D	Lead.
	max.	max.	max	Type	Φ
130V-075	12.8mm	18.0mm	3.8mm	5.1mm	0.60mm

Lead wire material: tin-plated metal wire, $\Phi 0.60\text{mm}$.

Encapsulation material: Flame-retardant epoxy powder, meeting UL94V-0 requirements

Electrical performance

Maximum overload current	$10A_{AC}$	Maximum voltage	$130V_{AC}$
Maximum non-operating current $25^{\circ}\text{C}\pm 2^{\circ}\text{C}$	750mA	Minimum operating current 25°C	1.5A
Starting zero-power resistor	$0.40-0.9\ \Omega$	Maximum resistance one hour after action	$2.0\ \Omega$

Testing conditions and delivery standards

Inspection items	Test	Delivery standard
Starting zero-power resistor	$25^{\circ}\text{C}\pm 2^{\circ}\text{C}$, Place in the air	$0.40-0.9\ \Omega$
Non-operating current	$25^{\circ}\text{C}\pm 2^{\circ}\text{C}$, 750mA , Maintain 60min	Non-operating
Typical action time	$25^{\circ}\text{C}\pm 2^{\circ}\text{C}$, 3.75A	Less than 5.5s
Motion durability	130V , 10A , 15min	No open flame or burning

Working temperature : -40 to 85

Packaging conditions: 500pcs per bag