


600V-110

Shape and size

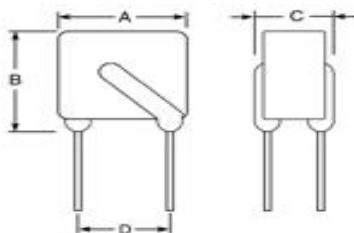

Model	A	B	C	D	Lead.
	max.	max.	max	Type	Φ
600V-110	14mm	14mm	6mm	5.1	0.60

Lead wire material: tin-plated metal wire, $\Phi 0.60\text{mm}$.

Encapsulation material: Flame-retardant epoxy powder, meeting UL94V-0 requirements

Electrical performance

Maximum overload current	3.0A _{RMS}	Maximum voltage	600V _{RMS}
Maximum non-operating current 25°C±2°C	110mA	Minimum operating current at 25°C±2°C	220mA
Starting zero-power resistor	6~16.0Ω	Maximum resistance one hour after action	24Ω

Testing conditions and delivery standards

Inspection items	Test	Delivery standard
Starting zero-power resistor	25°C ± 2°C, Place in the air	6.0~16.0Ω
Non-operating current	25°C ± 2°C, 110mA, Maintain 60min	Non-operating
Typical action time	25°C ± 2°C, 220VAC Initial current 1A	Less than 8S
Voltage withstand capacity	3A, 600V, Power on for 15 minutes	No open flame or burning

Working temperature : -40 to 85

Packaging conditions: 200pcs per bag