


60V-075

Shape and size

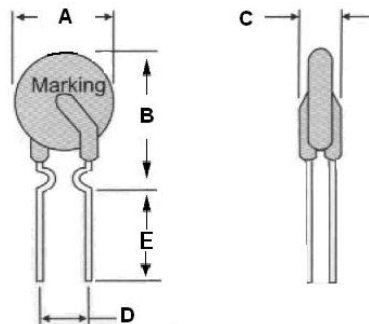

Model	A	B	C	D	E	Lead.
	max.	max.	max	$\pm 0.75\text{mm}$	Min	Φ
60V-075	10.4mm	18.4mm	3.0mm	5.1	4.6mm	0.60

Lead wire material: tin-plated metal wire, $\Phi 0.60\text{mm}$.

Encapsulation material: Flame-retardant epoxy powder, meeting UL94V-0 requirements

Electrical performance

Maximum overload current	40A_{DC}	Maximum voltage	60V_{DC}
Maximum non-operating current $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$	750mA	Minimum operating current 25°C	1.5A
Starting zero-power resistor	$0.25\text{--}0.42\ \Omega$	Maximum resistance one hour after action	$0.62\ \Omega$

Testing conditions and delivery standards

Inspection items	Test	Delivery standard
Starting zero-power resistor	$25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, Place in the air	$0.25\text{--}0.42\ \Omega$
Non-operating current	$25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, 750mA , Maintain 60min	Non-operating
Typical action time	$25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, 3.75A , 12V	Less than 5S
Motion durability	60V , 40A , 24hr	No open flame or burning

Working temperature : -40°C to 85°C

Packaging conditions: 1000pcs per bag