


60V-110

Shape and size

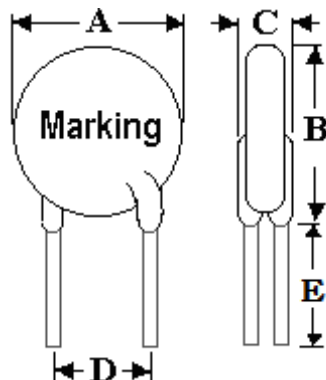

Model	A	B	C	D	E	Lead.
	max.	max.	max	$\pm 0.75\text{mm}$	Min	Φ
60V-110	13.0mm	18.0mm	3.0mm	5.1	7.6mm	0.80

Lead wire material: tin-plated metal wire, $\Phi 0.80\text{mm}$.

Encapsulation material: Flame-retardant epoxy powder, meeting UL94V-0 requirements

Electrical performance

Maximum overload current	$40A_{DC}$	Maximum voltage	$60V_{DC}$
Maximum non-operating current $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$	1.1A	Minimum operating current 25°C	2.2A
Starting zero-power resistor	$0.15-0.27\ \Omega$	Maximum resistance one hour after action	$0.40\ \Omega$

Testing conditions and delivery standards

Inspection items	Test	Delivery standard
Starting zero-power resistor	$25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, Place in the air	$0.15-0.27\ \Omega$
Non-operating current	$25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, 1.1A, Maintain 60min	Non-operating
Typical action time	$25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, 5.5A, 12V	Less than 8S
Motion durability	60V, 40A, 24hr	No open flame or burning

Working temperature : -40°C to 85°C

Packaging conditions: 1000pcs per bag